




MCC Camlock Gasket - Silicone

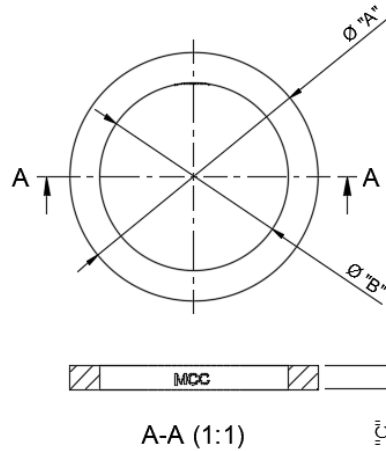

FEATURES & BENEFITS

Silicone rubber is a versatile material known for its exceptional temperature resistance, flexibility, and elasticity, making it suitable for dynamic applications in diverse industries like automotive, aerospace, and electronics. With outstanding chemical and weather resistance, it ensures durability in various environments. Its transparency and colour stability offer visual appeal. Its inert nature, ease of cleaning, and acceptance for food contact further enhance its usability.

SPECIFICATION

MCC Camlock Gasket (Size) Silicone interchangeable with MIL A-A-59326

MATERIAL

Silicone

DIMENSIONAL & SERVICE RATING

DN (mm)	Part #	"A"	"B"	"C"	Minimum Gasket Compression	Weight (kg)
15	50S	25.74	15.90	4.18	0.025 (Ref)	0.001
20	75S	34.93	22.23	5.54	0.025 (Ref)	0.004
25	100S	39.70	27.00	6.35	0.025 (Ref)	0.006
40	150S	55.58	41.28	6.35	0.025 (Ref)	0.009
50	200S	66.68	50.80	6.35	0.025 (Ref)	0.013
65	250S	79.38	60.33	6.35	0.025 (Ref)	0.018
80	300S	94.46	76.20	6.35	0.025 (Ref)	0.022
100	400S	123.83	101.60	6.35	0.025 (Ref)	0.035

TOLERANCE

Dimensions are in mm; tolerance for gaskets shall be +/- 0.38 for two place decimals, unless otherwise specified.

TEMPERATURE RATING

Typical temperature rating for NBR -40°C to +200°C (-40°F to +392°F)

STANDARDS

Dimensionally interchangeable with MIL A-A-59326

